





Lytespan® Track Lighting System **8226WH**


8226WH
8226BK

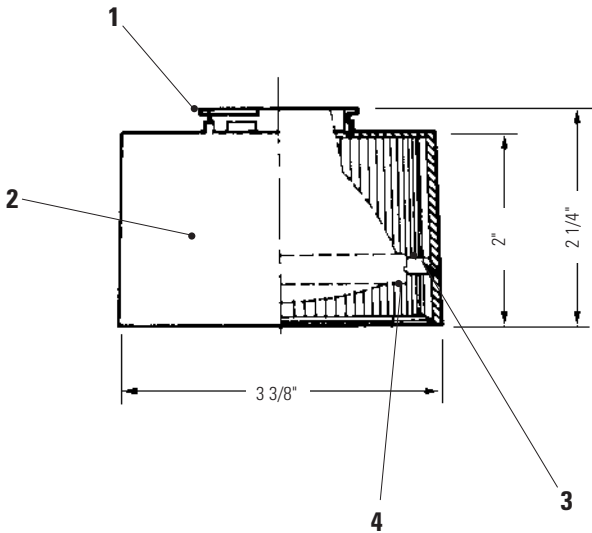

CYLINDER 20 WITH LOW PROFILE ADAPTER

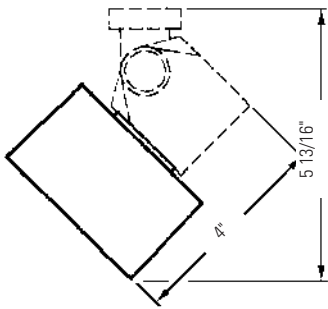

CYLINDER 20 WITH HINGED ADAPTER

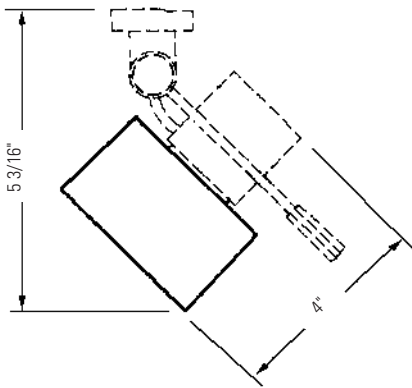

Ordering Information

Catalog No.	Finishes	Mounting	Lamps
8226WH 8226BK	Matte White Matte Black	All Lytespan Track Systems	PAR20, 50W Max. (Tungsten-Halogen)

Features

- 1. **Shade Attachment:** Zinc plated and painted C.R. steel. Bayonet fitting.
- 2. **Shade:** Single piece die-cast aluminum.
- 3. **Mounting Groove:** For accessories holder.
- 4. **Integral Verti-Grooves:** with black inside finish for glare control.

Options & Accessories

2 1/2" Beam Smoother, Beam Elongator, Louver and Barn Doors. All require Accessory Holder 8582. See Lightolier Specification Sheets AL2HC, AF2LF, AF2AS.

Finish

All painted finishes baked enamel.

Labels

UL; I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	



Lytespan® Track Lighting System **8226WH**


Page 2 of 2

PAR-Tech™ Cylinder 20 Shade

Lighting Data Aiming Angle

L Beam Length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

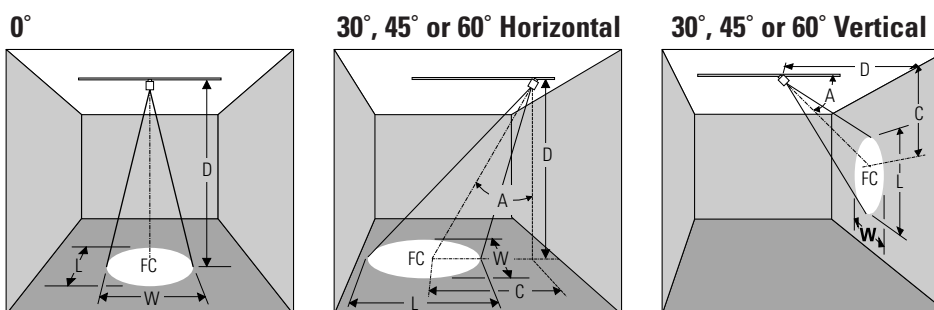

LAMP	Beam Spread 50% Max. CP	Beam Center C.P. Candelas	Rated Life-Hrs	0° AIMING ANGLE					A=30° AIMING ANGLE					A=45° AIMING ANGLE					A=60° AIMING ANGLE				
				D	FC	L	W		D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
35W PAR20 NSP (Halogen)	8°	3,000	2,500	6'	83	0.8'	0.8'		5'	2.9'	78	0.9'	0.8'	3'	3.0'	118	0.8'	0.6'	2'	3.5'	94	1.1'	0.6'
				8'	47	1.1'	1.1'		7'	4.0'	40	1.3'	1.1'	5'	5.0'	42	1.4'	1.0'	3'	5.2'	42	1.7'	0.8'
				10'	30	1.4'	1.4'		9'	5.2'	24	1.7'	1.5'	7'	7.0'	22	2.0'	1.4'	4'	6.9'	23	2.3'	1.1'
				12'	21	1.7'	1.7'		11'	6.4'	16	2.1'	1.8'	9'	9.0'	13	2.5'	1.8'	5'	8.7'	15	2.8'	1.4'
35W PAR20 FL (Halogen)	30°	900	2,500	3'	100	1.6'	1.6'		3'	1.7'	65	2.2'	1.6'	2'	2.0'	80	2.3'	1.5'	1'	1.7'	113	2.7'	1.1'
				5'	38	2.7'	2.7'		5'	2.9'	23	3.7'	3.1'	3'	3.0'	35	3.5'	2.3'	2'	3.5'	28	5.5'	2.1'
				7'	18	3.8'	3.8'		7'	4.0'	12	5.1'	4.3'	4'	4.0'	20	4.6'	3.0'	3'	5.2'	13	8.2'	3.2'
				9'	11	4.8'	4.8'		9'	5.2'	7	6.6'	5.6'	5'	5.0'	13	5.8'	3.8'	4'	6.9'	7	10.9'	4.3'
35W PAR20 WFL (Halogen)	40°	600	2,500	3'	67	2.2'	2.2'		3'	1.7'	43	3.0'	2.5'	2'	2.0'	53	3.4'	2.1'	1'	1.7'	75	4.8'	1.5'
				5'	24	3.6'	3.6'		5'	2.8'	16	5.1'	4.2'	3'	3.0'	24	5.0'	3.1'	2'	3.5'	19	9.7'	2.9'
				7'	12	5.1'	5.1'		7'	4.0'	8	7.1'	5.9'	4'	4.0'	13	6.7'	4.1'	3'	5.2'	8	14.5'	4.4'
				9'	7	6.6'	6.6'		9'	5.2'	5	9.1'	7.6'	5'	5.0'	8	8.4'	5.1'	4'	6.9'	5	19.3'	5.8'
50W PAR20 NSP (Halogen)	8°	6,000	2,000	6'	167	0.8'	0.8'		5'	2.9'	156	0.9'	0.8'	3'	3.0'	236	0.8'	0.6'	2'	3.5'	188	1.1'	0.6'
				8'	94	1.1'	1.1'		7'	4.0'	80	1.3'	1.1'	5'	5.0'	85	1.4'	1.0'	3'	5.2'	83	1.7'	0.8'
				10'	60	1.4'	1.4'		9'	5.2'	48	1.7'	1.5'	7'	7.0'	43	2.0'	1.4'	4'	6.9'	47	2.3'	1.1'
				12'	42	1.7'	1.7'		11'	6.4'	32	2.1'	1.8'	9'	9.0'	26	2.5'	1.8'	5'	8.7'	30	2.8'	1.4'
50W PAR20 SP (Halogen)	15°	3,200	2,000	6'	89	1.6'	1.6'		5'	2.9'	83	1.8'	1.5'	3'	3.0'	126	1.6'	1.1'	2'	3.5'	100	2.2'	1.1'
				8'	50	2.1'	2.1'		7'	4.0'	42	2.5'	2.1'	5'	5.0'	45	2.7'	1.9'	3'	5.2'	44	3.3'	1.6'
				10'	32	2.8'	2.8'		9'	5.2'	26	3.2'	2.7'	7'	7.0'	23	3.8'	2.6'	4'	6.9'	25	4.4'	2.1'
				12'	22	3.2'	3.2'		11'	6.4'	17	3.9'	3.3'	9'	9.0'	14	4.8'	3.4'	5'	8.7'	16	5.6'	2.6'
50W PAR20 NFL (Halogen)	27°	1,850	2,000	4'	116	1.9'	1.9'		3'	1.7'	134	2.0'	1.7'	3'	3.0'	73	3.1'	2.0'	1'	1.7'	231	2.3'	1.0'
				6'	51	2.9'	2.9'		5'	2.9'	48	3.3'	2.8'	4'	4.0'	41	4.1'	2.7'	2'	3.5'	58	4.8'	1.9'
				8'	29	3.8'	3.8'		7'	4.0'	25	4.6'	3.9'	5'	5.0'	26	5.1'	3.4'	3'	5.2'	26	7.0'	2.9'
				10'	19	4.8'	4.8'		9'	5.2'	15	5.9'	5.0'	6'	6.0'	18	6.1'	4.1'	4'	6.9'	14	9.3'	3.8'

Job Information

Type:

Lightolier a Genlyte Thomas Company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®